


extremeEDGE Server™ 3000 Series

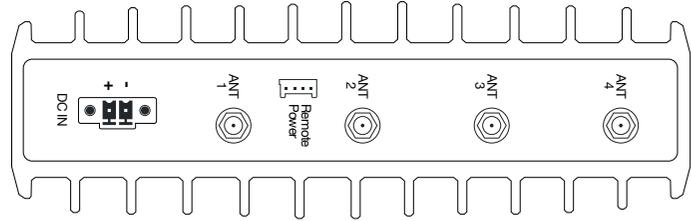

Product Overview

The 3000 series brings powerful processing to the extreme edge, enabling remote system monitoring and management via the built-in NANO-BMC (Baseboard Management Controller).

The fanless enclosure offers scalability with wattage, memory and storage configurations.

These products are powered using a Phoenix Contact style connector with screw posts.

Common IO features include USB-A 3.2 as well as Dual 2.5GbE, and Dedicated BMC LAN.

Remote control in any environment

The first of its kind, offering NANO-BMC out-of-band management in a small form factor enables remote management of edge devices in extreme conditions, worldwide.

Functionality Overview: Monitor, control, and manage hardware health and performance.

NANO-BMC Features:

Features	Function	Notes
Remote Console Access:	Accessing the system console for diagnostics and troubleshooting	Serial over IP
Remote Power Management:	Power-on/off control, power cycling reset	Hard & soft
Virtual Drive:	Make a local file or directory appear as a Drive on the Remote System	This allows updating the BIOS, installing an OS, or loading files remotely onto the system
Firmware Updates	Updating firmware remotely	Remotely maintain device security and functionality.

BMC Benefits:

- Remote access to hardware even when the main system is powered off.
- Increased system uptime and faster problem resolution.
- Improved power management and resource utilization.
- Remote Management reduces support cost.

Remote Access Methods:

- Dedicated BMC management interface.
- Integration with system management software.
- In-band management through OS applications (SSH, Telnet, etc). *Excludes Windows

Architecture

The 3000 series leverages two powerful AMD processors, the V3C18I and the 8840U.

Features	EE-3000	EE-3200
Processor	AMD Ryzen V3C18I (Zen 3)	AMD Ryzen 7 8840U (Zen 4)
BMC	NANO-BMC	NANO-BMC
Console Port, Mini-USB	USB Chip (FTDI RS232 Controller)	USB Chip (FTDI RS232 Controller)
TPM (Discrete)	TPM 2.0	TPM 2.0
Max Memory	128 DDR5 5600MHz (Read as 4800MHz)	128 GB DDR5 5600MHz (Read as 4800MHz)
Max Storage	12 TB	12 TB
Max Drives	3x 2280 M.2 PCIe Gen 4	3x 2280 M.2 PCIe Gen 4
USB	3x USB 3.2 1x USB 2.0	1x USB-C (AltDP) 3x USB 3.2 1x USB 2.0
Network	3x 2.5GbE 2x 10GbE SFP+ 1x 1GbE BMC	4x 2.5GbE 1x 1GbE BMC
Wifi-AC + Bluetooth	Optional	Optional
4G / 5G Modem	Optional	Optional
POE+ PD	N/A	N/A
Display Out	Headless	1x HDM 2.1, 1x USB-C (DP 2.1)
Video Chipset	N/A	Radeon 780M 12 Compute Units 2x 3840x2160
AI Accelerator	Optional Module	38 TOPS + Optional Module
Operating Temperature	-40°C to 85°C	
Mounting (Optional)	DIN-Rail, 1U Rackmount	

Product Differentiating Features

Built for the Edge: Power and Efficiency in a Compact Design

The 3000 series thrives in edge computing applications where space is limited and on-site processing is crucial. Its compact size brings powerful computing to the edge of your network, while remote monitoring and management capabilities enhance security and simplify control.

Quiet Operation, Lower Costs

These fanless systems operate silently and consume minimal power – up to 50 watts under load, significantly less than a traditional server with a single CPU. This translates to lower energy costs and a reduced environmental footprint.

Flexible Mounting, Scalable Performance

The 3000 series adapts to diverse environments with its DIN rail compatibility, making installation a breeze. Additionally, it supports memory, storage, Wi-Fi Radios and LTE/5G modems configurations, allowing you to tailor the system to your specific data storage and management requirements.

NANO-BMC (Baseboard Management Controller)

The 3000 series of products redefines remote management with its built-in patent pending NANO-BMC module. This module enables secure out-of-band access for monitoring, control, and power management, including remote power cycling, reboots, virtual drives, and critical BIOS updates.

Display Support

The EE-3200 systems features an integrated AMD Radeon 780M GPU (RDNA3 architecture) with the following display connectors:

- 1x HDMI 2.1 port
- 1x USB-C port (USB 4.0 with DisplayPort 2.1 Alt Mode support)

Supported Multi-Display Configurations

The EE-3200 systems support up to 2 displays

- Two 3840x 2160 @ 120 Hz (4K)

SFP+ Key Features

- **High-Speed Connectivity:** Supports data transfer rates up to 10 gigabits per second (Gbps) per port, enabling significant performance improvements over traditional Gigabit Ethernet connections.
- **SFP+ Interface:** Compatible with SFP+ transceivers (sold separately), providing flexibility for various network cable types (Fiber Optic or Copper) based on your specific needs.
- **Dual-Port Design:** This enables you to connect two separate 10 Gb/s devices, expanding your network bandwidth and facilitating communication between high-performance systems.
- **AMD 10GEMAC Technology:** Built with AMD's 10GE MAC controller, ensuring reliable and efficient data transfer.

SFP+ Benefits

- **Ideal for Demanding Applications:** Perfect for applications requiring high-bandwidth data transfer, such as data centers, cloud computing environments, video editing workstations, and more.
- **Future-Proofs Your Network:** Prepares your network for future data transfer needs and supports demanding workloads.
- **Increased Scalability:** Allows you to easily connect multiple high-performance devices to your network.

Note: SFP+ transceivers are required for operation (not included) and should be chosen based on your desired network cable type (fiber optic or copper) and transmission distance.

Modem

The 3000 series supports either a 4G (LTE) or 5G modem in a 3042 or 3052 M.2 B-Key module.

- **LTE and 5G are supported for locations where wireless connectivity is required.**
- **Two SIM card slots are provided to support two providers as a backup for weak signal locations.**
- **5G is further enhanced with ultra-low latency of up to only ~ 5 ms improving download speed.**

Expandable Memory

The EE-3000 supports ECC or Non-ECC, while the EE-3200 supports Non-ECC memory only.

Memory

Feature	Maximum Configurations	Supported Types
Non-ECC	16 GB, 32 GB, 64 GB, 96 or 128 GB	DDR5-4800 2x SODIMM / Dual Channel
ECC	32 GB, 64 GB, or 96 GB	DDR5-4800 2x ECC SODIMM / Dual Channel

AI Support

The 3000 Series supports an optional AI Acceleration module via up to two of the three available 2280 M.2 slots. This enables AI Compute Acceleration at a higher performance and lower power, the 2230 Wi-Fi slot can also be used. Inferencing and Neural Network processing can be performed using widely available AI Accelerators.

The EE-3200 have native AI acceleration within the processor as shown in the table below:

AI Engine Capabilities	EE-3000	EE-3200
NPU Performance	N/A	Up to 16 TOPS
Platform Performance	Depends on AI Accelerator(s)	38 TOPS plus AI Accelerator(s)

Additional Product Protection

The 3000 series of products can be treated with a “Conformal Coating” at the PCBA level allowing for a higher level of protection against dust, moisture, and harsh chemical intrusion. Contact salesman for volume orders.

Models

The 3000 series can be ordered with different max processor operating wattage based on passive or active cooling. The unit can be ordered with either passive cooling, or the “T” version is for active cooling in a 1U height, half width server sled. The 1U Server Cabinet accepts two sleds.

Model	CPU Watts
EE-3000	Up to 15 Watt TDP
EE-3000T	Up to 35 Watt TDP Sled Version
EE-3200	Up to 30 Watt TDP
EE-3200T	Up to 35 Watt TDP Sled Version

Power Supply

Specification	Specification Limits	Notes
AC Input Range	100 - 240 VAc	50 Hz to 60 Hz
DC Voltage Out	19 VDc	Regulated +/- 5%
Amperage	4.74 Amps	Maximum
Wattage Out	90 Watts	Maximum
System Connection	2 Pin Phoenix	Keyed Connector w/ Screw Down (Positive Retention)

System Dimensions & Weight

Dimensions	Weight
160 mm (L) x 130 mm (W) (6.3" x 5.11") Height depends on model 15w = 29mm (1.14") height 30w = 45mm (1.77") height 35w = 29mm (1.14") height	2.65 LBs / 1.20 Kg 2.75 LBs / 1.25 Kg 3.10 LBs / 1.40 Kg Final weight dependent on configuration



Certifications

Certifications	Notes
FCC	Federal Communication Commission
CE	Consumer Electronics
ROHS	Restriction Of Hazardous Substances
REACH	Registration / Evaluation / Authorization / Restriction Of Chemicals

Service & Support

Global Support	
Integration Services	Custom Configuration Service - BIOS Settings, Imaging, System Configuration & Labeling
Deployment Services	Field Deployment Management
Support	In-region Technical Support



Illustrated I/O Port Overview EE-3000

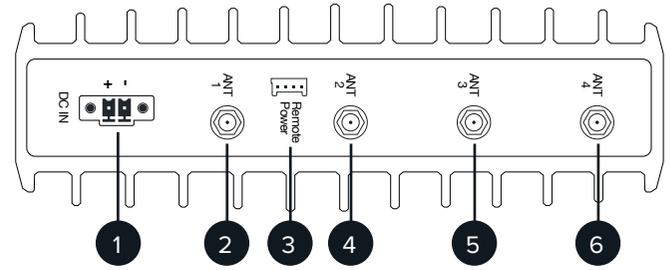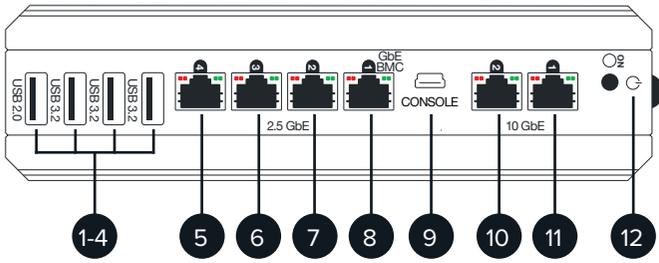

FRONT			
1	USB-A 2.0	7	2.5 GbE
2	USB-A 3.2	8	1 GbE BMC
3	USB-A 3.2	9	BMC CONSOLE
4	USB-A 3.2	10	10 GbE
5	2.5 GbE	11	10 GbE
6	2.5 GbE	12	POWER BUTTON

TOP			
1	DC-IN	5	WI-FI ANTENNA
2	LTE ANTENNA	6	LTE ANTENNA
3	REMOTE POWER		
4	WI-FI ANTENNA		

Illustrated I/O Port Overview EE-3200

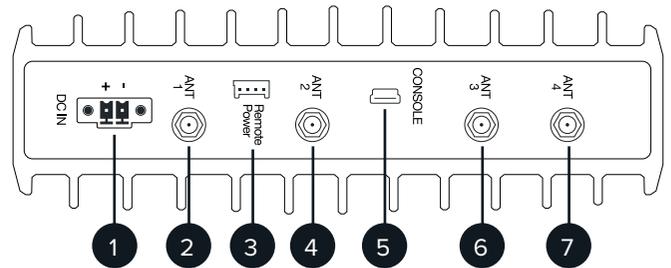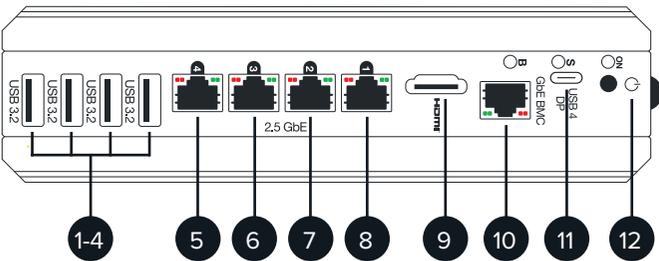

FRONT			
1	USB-A 3.2	7	2.5 GbE
2	USB-A 3.2	8	2.5 GbE
3	USB-A 3.2	9	HDMI™
4	USB-A 3.2	10	GbE BMC
5	2.5 GbE	11	USB-C 4.0 / Alt-DP
6	2.5 GbE	12	POWER BUTTON

TOP			
1	DC-IN	5	BMC CONSOLE
2	LTE ANTENNA	6	WI-FI ANTENNA
3	REMOTE POWER	7	LTE ANTENNA
4	WI-FI ANTENNA		



Learn more about
SNUC BMC-ENABLED
extremeEDGE Servers™



Contact
a SNUC Live Support
Customer Support Agent



View more resources
online at
www.SNUC.com



Join the
conversation
@SNUC